

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 5 TOWNSHIP 16 RANGE 5

DATE: 11-8-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Survey marker nail

METHOD OF ESTABLISHMENT: County: 7-25-98


IN. S.P.C. E ZONE NAD '83

NAME: 16050505

N: 512343.1334(m)

E: 71388.0081(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

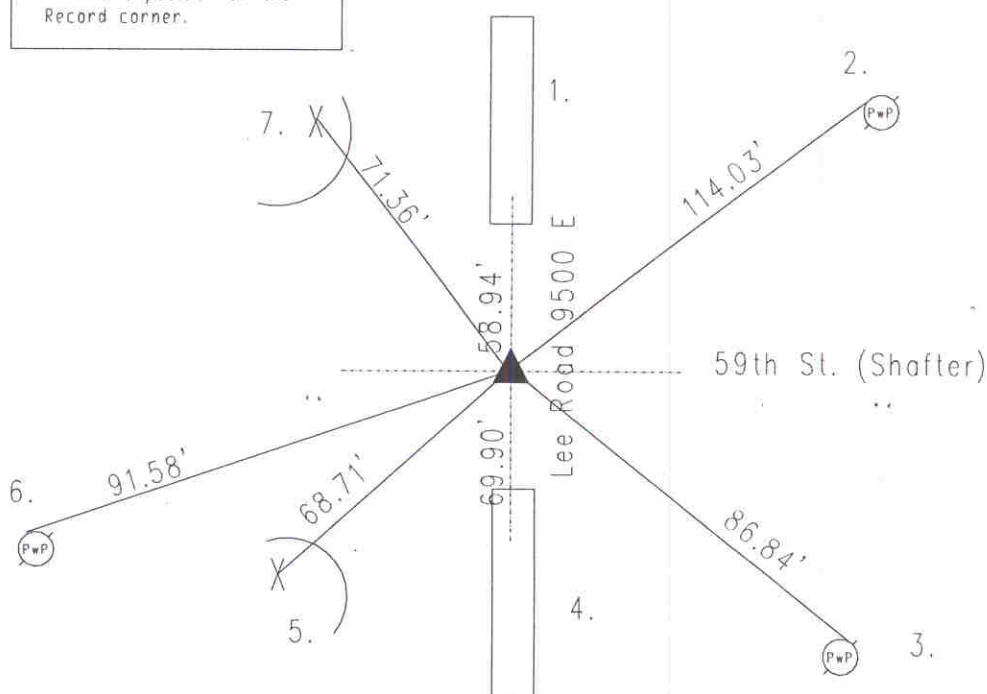

Legal Survey book has no information on stone nor witness. MCSO (unknown date) early date and does not call out type of marker. Wilcoxon 11-19-96 and railroad spike was found per Schneider Engineering survey of Ft. Harrison. Excavated 7-25-98 by Wilcoxon and railroad spike was fd 3" down. Harrison set. Re-tied 11-8-03 by Wilcoxon.
16050505

REF.	DISTANCE	DESCRIPTION
1.	58.94'	Due N to Cut 'x' in pavement
2.	114.03'	Mag nail w/brass washer NW PwP#287-321 B 10"up
3.	86.84'	Mag nail w/brass washer NE PwP#731-351 B 12"up
4.	69.90'	Due S to cut 'x' in pavement
5.	68.71'	Cut 'x' in sidewalk
6.	91.58'	Mag nail w/brass washer NW PwP#613-351 A 10"up
7.	71.36'	Cut 'x' in sidewalk